



FT8[®] MOBILEPAC[®] Gas Turbine Package

25 Megawatts of Mobile Power

The MOBILEPAC[®] gas turbine package is the industry leader in providing state of the art technology with over 30 years of experience. After many successful years of operation, the MOBILEPAC[®] gas turbine package now utilizes the FT8[®] engine and offers 25 megawatts of movable power. Utilizing the proven SWIFTPAC[®] gas turbine package technology, this package is designed to provide quick, reliable power and is especially useful in emergency situations.

The MOBILEPAC[®] gas turbine package design includes two trailers. The first contains the gas turbine, electric generator, exhaust collector, diffuser and engine lube oil system. The second trailer carries the 15- kilovolts switchgear, control system, operation panel, protective relays, batteries and charger, motor control center and the hydraulic start package. A pre-commissioned MOBILEPAC[®] gas turbine package can be driven to a site and begin generating power in less than one day.

USP&E

POWERING BUSINESS. EMPOWERING PEOPLE.

PW Power Systems

a group company of  **MITSUBISHI HEAVY INDUSTRIES, LTD.**

Scheduel A: FT8 Performance Curves

FT8[®] MOBILEPAC[®] Gas Turbine Package

The FT8[®] MOBILEPAC[®] gas turbine package requires the smallest footprint in the industry, utilizing at minimum a 25- by 60-foot area. Very little advanced site preparation is required, and no foundation or concrete pad is necessary for installation of the unit. The unit is transportable by land, sea or air, allowing worldwide delivery of the MOBILEPAC[®] gas turbine package within 24 hours.



Typical Performance

FT8[®] MOBILEPAC[®] gas turbine package 50Hz, 11.0kV, 09Pf

Estimated gross power output vs. ambient temperature and heat rate vs. ambient temperature FT8[®] MOBILEPAC[®] gas turbine package, natural gas, WI-25 ppm NOx

Sea level, 60% RH, 63.5 mm W.C. inlet loss, 25.4 mm exhaust loss

Gas Fuel 50 Hertz Water Injected

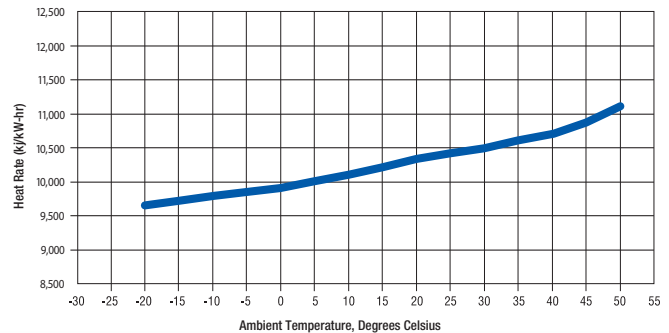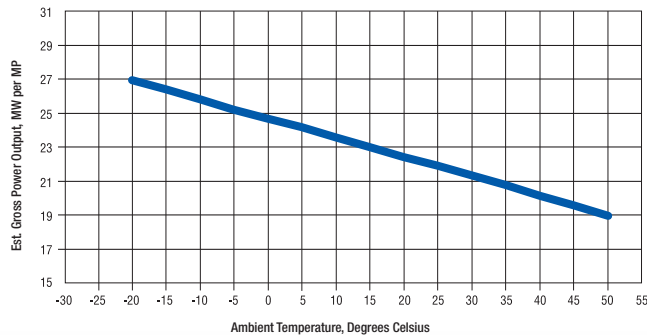

Benefits

- Ready for emergency power within one day (site ready)
- Environmentally compatible
- Dual fuel/dual frequency
- Optional black start capability
- Flexible trailer sighting
- Highway compatible
- Three-point support and structural rigidity to maintain generator alignment
- Remote operation

Product Facts

Output	25,000 kW
Base engine	FT8 [®]
Number of trailers	2
Installation	8 hrs (site ready and previously commissioned)
Noise	95 dBA at 1 m
NOx/CO	50/100 mg/m ³
Grid	50 or 60 Hz
Fuel	Liquid or gas